



ASTRAFOOD

DFA 150-500

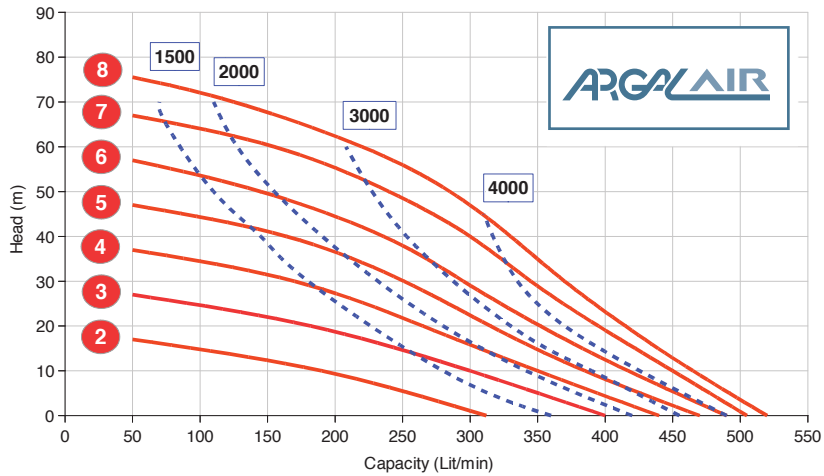

bar Air Pressure main supply **NI/min** Air consumption

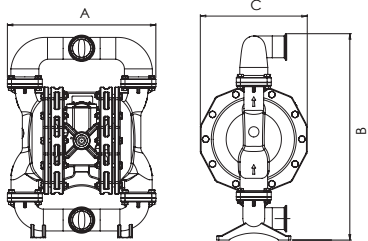

| DIMENSIONS (mm) | |
|-----------------|-------------------|
| AISI 316 | A 361 B 260 C 502 |


| TECHNICAL DATA | |
|-------------------|-----------------|
| Fluid connections | • Tri-Clamp 2½" |
| Air connection | ¾" BSP |
| Max flow rate | 500 l/m' |
| Max air pressure | 8 bar |
| Max viscosity | 50.000 cPs |

| COMPOSITION | |
|--------------|---------------------|
| Wetted parts | • AISI 316 Polished |
| Diaphragms | • NBR+PTFE |
| Valve Balls | • PTFE • AISI 316 |
| Valve Seats | • AISI 316 |
| Gaskets | • PTFE |


Connections scheme page 28

* Optional

DFA 200-650

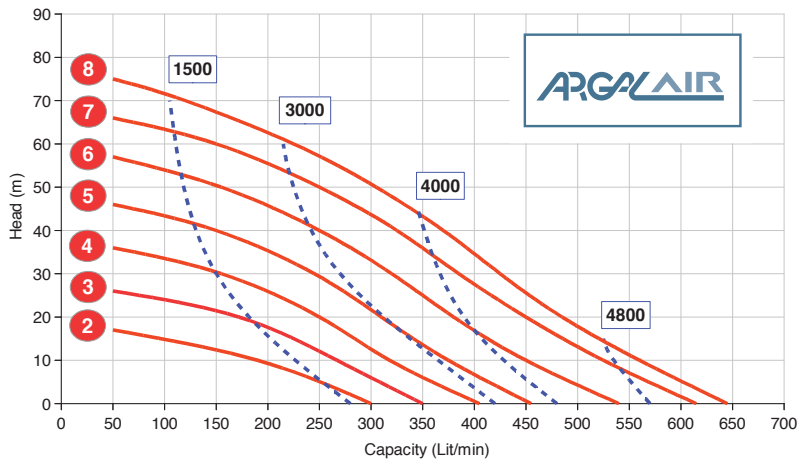

bar Air Pressure main supply **NI/min** Air consumption

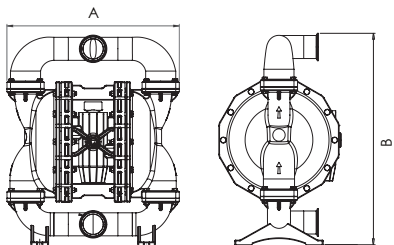

| DIMENSIONS (mm) | |
|-----------------|-------------|
| AISI 316 | A 487 B 598 |

| TECHNICAL DATA | |
|-------------------|---------------------------|
| Fluid connections | • Tri-Clamp 2½" • BSP* |
| Air connection | ¾" BSP |
| Max flow rate | 650 l/m' |
| Max air pressure | 8 bar |
| Max viscosity | 50.000 cPs |

| COMPOSITION | |
|--------------|---------------------|
| Wetted parts | • AISI 316 Polished |
| Diaphragms | • HYTREL+PTFE |
| Valve Balls | • PTFE • AISI 316 |
| Valve Seats | • AISI 316 |
| Gaskets | • PTFE |

Connections scheme page 28

* Optional