



DFA 75-100

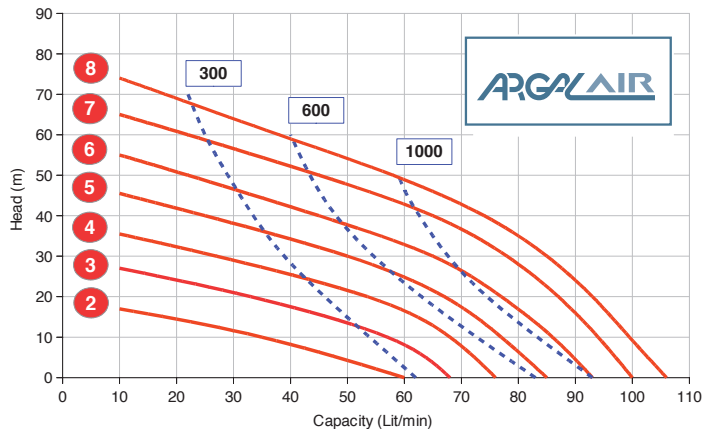

bar Air Pressure main supply **NI/min** Air consumption

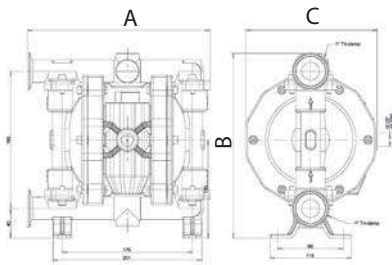

DIMENSIONS (mm)	
AISI 316	A 247 B 249 C 177


TECHNICAL DATA	
Fluid connections	• Tri-Clamp 1" • BSP*
Air connection	3/8" BSP
Max flow rate	100 l/m'
Max air pressure	8 bar
Max viscosity	25.000 cPs

COMPOSITION	
Wetted parts	• AISI 316 Polished
Diaphragms	• HYTREL+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• AISI 316
Gaskets	• PTFE


Connections scheme page 28

* Optional

DFA 125-250

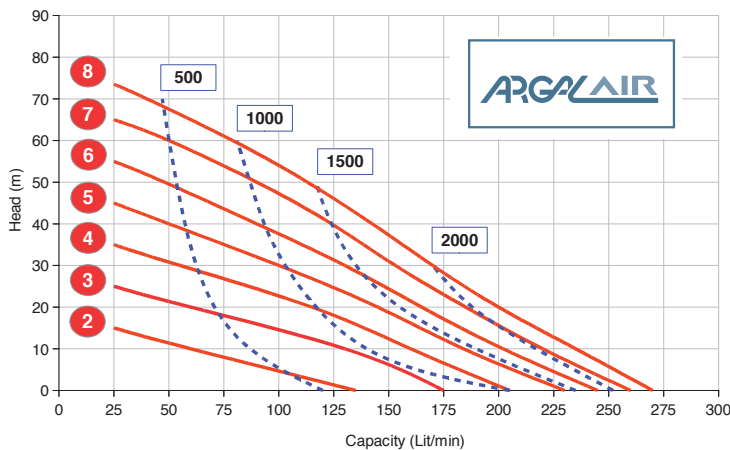

bar Air Pressure main supply **NI/min** Air consumption

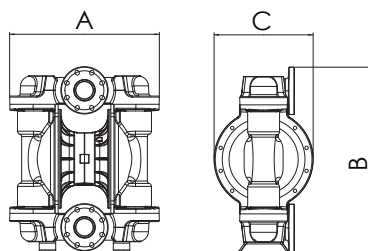

DIMENSIONS (mm)	
AISI 316	A 360 B 222 C 346

TECHNICAL DATA	
Fluid connections	• Tri-Clamp 1 1/2" • BSP*
Air connection	1/2" BSP
Max flow rate	250 l/m'
Max air pressure	8 bar
Max viscosity	35.000 cPs

COMPOSITION	
Wetted parts	• AISI 316 Polished
Diaphragms	• HYTREL+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• AISI 316
Gaskets	• PTFE

Connections scheme page 28

* Optional